

# KESTER® TSF-6592HF

## No-Clean Tacky Soldering Flux

### DESCRIPTION

Kester **TSF-6592HF** is a no-clean paste flux designed as a lead-free solution for an array of lead-free interconnect applications such as flip chip attach, sphere or ball attach, rework/repair of CSPs, BGAs, SMDs, or any lead-free soldering application that requires a very tacky flux. It has been optimized for consistent high speed printing applications.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

### FEATURES & BENEFITS

- Compatible with Lead Free alloys such as SnAg, SnCu, SnAgCu, SnAgBi
- Reflow-able with peak temperatures up to 270 °C
- Reflow-able in air and nitrogen
- Bright shiny soldered joints with clear residues
- Aggressive flux on various substrates such as OSP-Cu, Immersion finishes and ENIG
- Clear non-tacky residues
- High tack to minimize skewing of components
- Low voiding
- Stencil life of 8+ hours (process dependent)
- Classified as ROL0 per J-STD-004
- Compliant to Bellcore GR-78

### RoHS COMPLIANCE

This product meets the requirements of the Restriction of Hazardous Substances (RoHS) Directive, 2015/863 for the stated banned substances.

### PHYSICAL PROPERTIES

**Viscosity (typical):**

235 poise

Malcom Viscometer @ 10rpm and 25 °C

**Initial Tackiness (typical):** 100 grams

Tested to J-STD-005, IPC-TM-650, Method 2.4.44

**Acid Number:**

85 mg KOH/g of flux

Tested to J-STD-004, IPC-TM-650, Method  
2.3.13**RELIABILITY PROPERTIES****Copper Mirror Corrosion:** Low

Tested to J-STD-004, IPC-TM-650, Method 2.3.32

**Corrosion Test:** Low

Tested to J-STD-004, IPC-TM-650, Method 2.6.15

**Silver Chromate:** Pass

Tested to J-STD-004, IPC-TM-650, Method 2.3.33

**Chloride and Bromides:** None Detected

Tested to J-STD-004, IPC-TM-650, Method 2.3.35

**SIR, IPC (typical):** Pass

Tested to J-STD-004, IPC-TM-650, Method 2.6.3.3

**Fluorides by Spot Test:** Pass

Tested to J-STD-004, IPC-TM-650, Method 2.3.35.1

	Blank	TSF-6592HF
Day 1	4.6*10 <sup>9</sup> Ω	1.3*10 <sup>9</sup> Ω
Day 4	5.5*10 <sup>9</sup> Ω	1.0*10 <sup>9</sup> Ω
Day 7	5.2*10 <sup>9</sup> Ω	1.0*10 <sup>9</sup> Ω

**STANDARD APPLICATIONS**


TSF-6592HF is designed for stencil/screen printing, rotating drum, slide fluxers and/or syringe applications. This flux is great for rework applications on all PCB packages of various electronic devices. TSF-6592HF can be used in BGA/PGA sphere/pin attachment vehicle or for repair and reballing/repinning. This flux works on flip chip, chip scale package and flip chip bumping sites assemblies as a soldering paste flux.

## PRINTING PARAMETERS

**Temperature/Humidity** Optimal ranges are 21 to 25 °C (70 to 77 °F) and 35 to 65% RH

## RECOMMENDED REFLOW PROFILE

The recommended convection reflow profile for TSF-6592HF with Sn96.5Ag3.5, Sn99.3Cu0.7 or the various SnAgCu alloys is shown here. This profile is simply a guideline. As TSF-6592HF was engineered to be a versatile, robust interconnect material, other reflow profiles would be effective. Your optimal profile may be different from the one shown here based on your oven, component design, fixturing and mix of defects. Please contact Kester Technical Support if you need additional profiling advice.

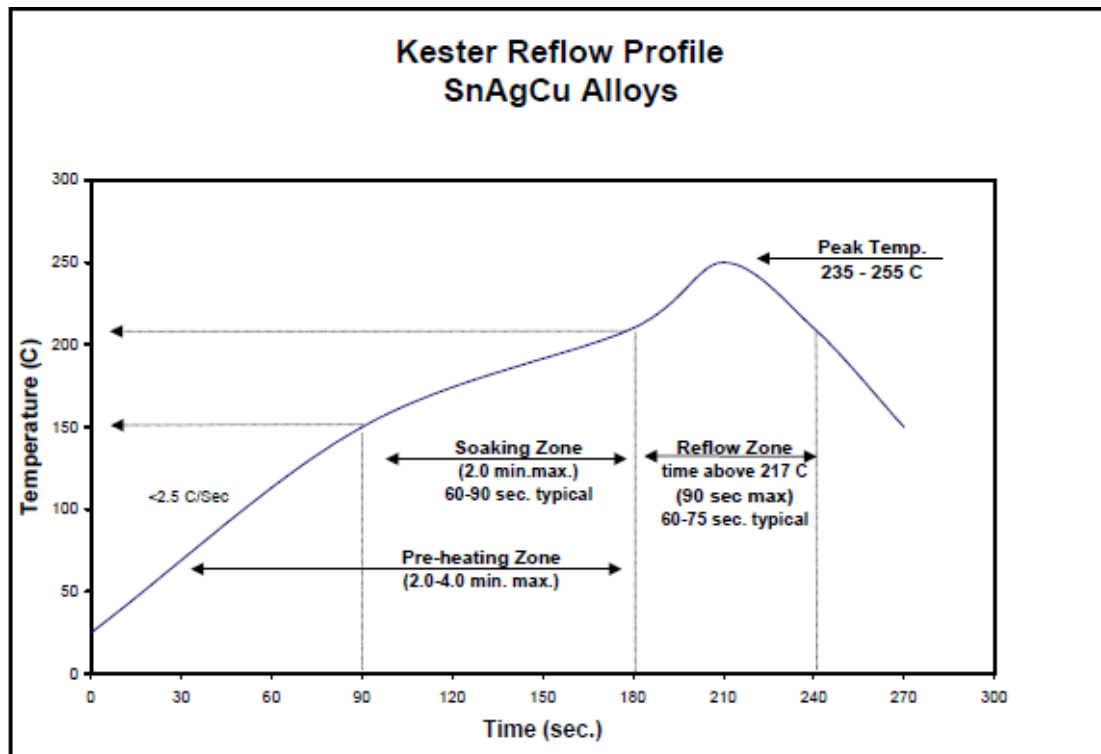

## CLEANING

TSF-6592HF is a no-clean chemistry. The residues do not need to be removed for typical applications. If residue removal is required, call Kester Technical Support.

**STORAGE**

Refrigeration (0 to 10 °C (32 to 50 °F)) is the recommended optimum storage condition for TSF-6592HF to maintain consistent viscosity, reflow characteristics and overall performance. TSF-6592HF should be stabilized at room temperature prior to printing. Please contact Kester if you require additional advice with regard storage and handling of this material. Shelf life is 4 months from date of manufacture when handled properly and held at 0 to 10 °C (32 to 50 °F).

**SAFETY & WARNING**

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available.**

**WASTE TREATMENT**

Prior to using any recommendations or suggestions for waste treatment, the user is required to know the appropriate local/state/federal regulations for on-site or off-site treatment which may require permits. If there is any conflict regarding our recommendations, local/state/federal regulations take precedent.

**CONTACT INFORMATION**

[www.macdermidalpha.com](http://www.macdermidalpha.com)

<b>North America</b> 140 Centennial Avenue Piscataway, NJ 08854 1.800.367.5460	<b>Europe</b> Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400	<b>Asia</b> 14 Joo Koon Crescent, Singapore 629014 65.6430.0700
---	---	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "®" and "™" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.