

KESTER® R231 SOLDER PASTE

Mildly Activated Rosin Solder Paste

DESCRIPTION

Kester R231 Solder Paste is a Mildly Activated Rosin (RMA) solder paste formula specifically designed to exhibit long stencil/print life. R231 maintains its activity and printing characteristics for up to 8 hours (temperature and humidity dependent).

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES & BENEFITS

- High print speeds to 200 mm/sec (8 in/sec)
- Compatible with 0201 technology
- Excellent printing characteristics to 0.4mm (16-mil) pitch with Type 3 powder
- Excellent wetting on a variety of substrates, including OSPs
- Capable of 90 minute break times in printing
- Stencil life: 8+ hours (process dependent)
- Scrap is reduced due to less paste dry out
- Stable tack over 8+ hours
- Classified as ROL0 per J-STD-004
- Compatible with DEK ProFlow™ and MPM RheoPump™ enclosed print head systems

STANDARD APPLICATIONS

Stencil Printing – 90% Metal

Enclosed Head Printing – 90% Metal

TECHNICAL DATA

Category	Results	Procedure/Remarks
Physical Properties (Data given for Sn63Pb37 and Sn62Pb36Ag02, 90% metal, -325+500 mesh)		
Viscosity (typical)	1600 poise	Malcom Viscometer @ 10 rpm and 25 °C
Initial Tackiness (typical)	42 grams	Tested to J-STD-005, IPC-TM-650, Method 2.4.44
Slump Test	Pass	Tested to J-STD-005, IPC-TM-650, Method 2.4.35
Solder Ball Test	Preferred	Tested to J-STD-005, IPC-TM-650, Method 2.4.43
Wetting Test	Pass	Tested to J-STD-005, IPC-TM-650, Method 2.4.45
Reliability Properties		
Copper Mirror Corrosion	Low	Tested to J-STD-004, IPC-TM-650, Method 2.3.32
Corrosion Test	Low	Tested to J-STD-004, IPC-TM-650, Method 2.6.15
Silver Chromate	Pass	Tested to J-STD-004, IPC-TM-650, Method 2.3.33
Fluorides by Spot Test	Pass	Tested to J-STD-004, IPC-TM-650, Method 2.3.35.1
Surface Insulation Resistivity (SIR), IPC (Typical)	Pass	Tested to J-STD-004, IPC-TM-650, Method 2.6.3.3
		BlankR231
	Day 1	1.5 x 10 ¹⁰ Ω5.3 x 10 ⁹ Ω
	Day 4	6.0 x 10 ⁹ Ω2.6 x 10 ⁹ Ω
	Day 7	5.5 x 10 ⁹ Ω2.9 x 10 ⁹ Ω


PROCESSING GUIDELINES

Printing Parameters

Squeegee Blade	80 to 90 durometer polyurethane or stainless steel
Squeegee Speed	Capable to a maximum speed of 200 mm/sec (8 in/sec)
Stencil Material	Stainless Steel, Molybdenum, Nickel Plated, Brass
Temperature/Humidity	Optimal ranges are 21 to 25 °C (70 to 77 °F) and 35 to 65% RH

Recommended Reflow Profile

The recommended reflow profile for R231 made with Sn63Pb37 and Sn62Pb36Ag02 alloys is shown here. This profile is simply a guideline. Since R231 is a highly active solder paste, it can solder effectively over a wide range of profiles. Your optimal profile may be different from the one shown based on your oven, board and mix of defects. Please contact MacDermid Alpha Technical Support if you need additional profiling advice.

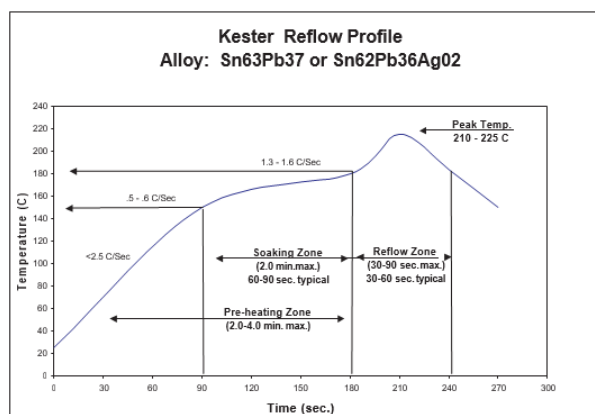

Cleaning

R231 is an RMA formula. The residues do not need to be removed for typical applications. Although R231 is designed for RMA applications, its residues can be easily removed using automated cleaning equipment (in-line or batch) with a variety of readily available cleaning agents. Call MacDermid Alpha Technical Support for details.

Storage, Handling and Shelf Life

Refrigeration is the recommended optimum storage condition for solder paste to maintain consistent viscosity, reflow characteristics and overall performance. R231 should be stabilized at room temperature prior to printing. R231 should be kept at standard refrigeration conditions, 0 to 10 °C (32 to 50 °F). Please contact MacDermid Alpha if you require additional advice with regard storage and handling of this material. Shelf life is 4 months from date of manufacture when handled properly and held at 0 to 10 °C (32 to 50 °F).

AVAILABILITY

Kester R231 is available in the Sn63Pb37 and Sn62Pb36Ag02 alloys with Type 3 powder. Type 3 powder mesh is recommended, but different powder particle size distributions are available for standard and fine pitch applications. For specific packaging information see Kester's Solder Paste Packaging Chart for available sizes. The appropriate combination depends on process variables and the specific application.

RECYCLING SERVICES

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams.

Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area.



SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available.**

CONTACT INFORMATION

www.macdermidalpha.com

North America 140 Centennial Avenue Piscataway, NJ 08854 1.800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400	Asia 8/F., Two Sky Parc 51 Hung To Road Kwun Tong, Kowloon, Hong Kong, SAR China 852.2500.5365
---	---	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.